



AH-9717



AH-9717

Manual Call Point & Telephone Handset

Features

- Emergency press alarm, immediately activates fire alarm signal.
- Indicator light above fire alarm push-button confirms the alarm signal transfer.
- There are a phone jack and reset button behind the cover cap.
- Type I is simultaneous dual loop, Type II is simultaneous dual signal transfer (refer to diagram below)
- Optional base is available.

Specifications


Model	AH-9717
Operating Power	24V DC 30mA
Operating Contact	Max. 30V DC 500mA
Sub-function	Phone jack, confirmation LED, reset button.
Material	Fire-proof plastic
Dimensions	140mm(Dia.) x 45mm(H)
Weight	About 160g



Telephone Handset



Bag for Telephone Handset

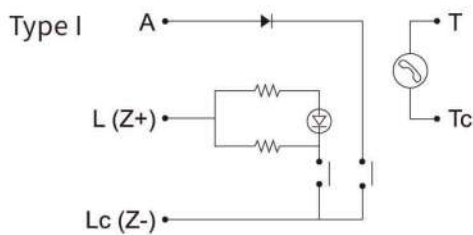

Agent In Thailand : U.P.TECH CORPORATION CO.,LTD
 28 Soi Rattana Thibet 28 Yaek 2 Bangkrasor Muangnonthaburi
 Nonthaburi 11000 Thailand
LINE : 0863133492 **Tel :** 02-965-7701-6, 086-355-6781
Email : sales@up-t.com **Email :** admin@up-t.com
Website : www.alarmpthailand.com , www.firealarmonline.com

HORING LIH INDUSTRIAL CO., LTD.

4F., No. 18, Lane 327, Chung Shan Road, Sec. 2, Zhonghe District 235, New Taipei City, **Taiwan**
Tel : +886 2 22487599 **Fax :** +886 2 22407752 **Email :** export@horinglih.com **Website :** www.horinglih.com