



FOREND DIGITAL LIGHTNING STRIKE COUNTER (LSC-D)

It is capable of measuring 1kA – 250kA lightning strike.

If you press and release the red button for approximately 1 second, you can monitor the number of strikes the device has counted.

If the button is pressed constantly, the device switches to TEST mode (The display projects tS O). When a magnet is brought near the display, the device may count up to 9 no. This indicates that the device is sensitive to magnetic field and it is operational.

If the display outputs LO When the red button is pressed, this means that the battery needs to be recharged. The counter needs to be recharged for at least one hour. The charged device operates for more than 5 months.

For recharging, please use the adaptor enclosed in the box. The adaptor must output 5,7v – 7,2v.

The device is IP65 protected.

Due to the product waiting at the shelf for prolonged period of time, the device needs to be recharged for 1 hour before use.




RED BUTTON



COUNTING MODE



TEST MODE

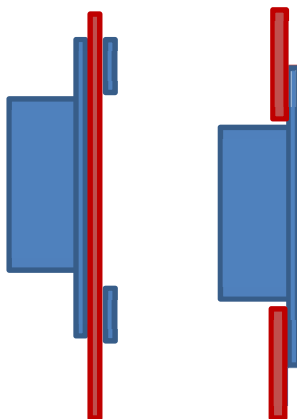

CONDUCTOR CONNECTION TYPES



ADAPTOR INPUT