


YA-CH710

Combination Heat Detector

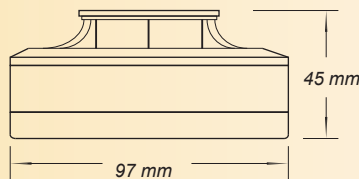

Characteristics

- Highlight dual color LED indicator
- Current network output, 2 wire with remote LED signal output
- Low power consumption
- Network by current, N.O/N.C (optional)
- Power-off reset function

YA-CH710 Rate of Rise & Fixed Temperature Detector

Specification

Model / Product	YA-CH710 2 Wire / Combination Heat Detector
Input Voltage	9-28 VDC
Static Current	50±5 uA (at DC24V)
Alarm Current	70±5mA (at DC24V)
Operating Temperature	0°C ~ + 85°C
Operating Humidity	<90%RH
Installation	Ceiling mounted
Output / Wiring Mode	3 VDC Remote indicator Lamp / 2 wire with remote LED signal output
Alarm Temperature	Rate-of-rise: 8-15°C/min & Fixed temperature: 57±6°C
Alarm Reset	Power off reset / Auto reset
LED Indicator	Detecting: Green LEDs flash / Alarm: Red LEDs ON
Material / Color	ABS Plastic / White Color
Dimension	∅ 97 x 45 mm.

Effective Alert Area

Construction Height	4 m
Fireproof Building	60 m ²