


AH-0933

Mechanical Rate of Rise Heat Detector

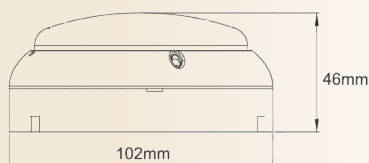

Characteristics

- Detector is made of high endurance, solid and colorfast Fire-proof plastic.
- Non-loosening screws on base terminal for easy installation.
- The unit is completely sealed; its function is not affected by humidity, dust or insects.
- This detector has passed strict quality control and repetitive testing, hence its quality is stable and highly reliable.

Mechanical Rate of Rise Heat Detector
Model : AH-0933
Manufactured : HORING LIH INDUSTRIAL CO.,LTD
Approvals : **CE**

Specifications

Model	AH-0933-2 , Type 2 Wire	
Voltage Range	12 ~ 30V DC	
Alarm Current @24V DC 470Ω	40mA	
Alarm Temperature	Comply to EN54	
Ambient Temperature	0 °C ~ +55 °C	
Material	Fire-proof plastic	
Dimensions	102mm(Dia.) x 46mm(H)	
Weight	130g	
Color	White	

Effective alert area

Construction/Height	Under 4M	4M ~ 8M
Fire-proof Building	90 M ²	45 M ²
Ordinary Building	50 M ²	30 M ²