


AH-0822

Gas Detector

Natural Gas & Propane Gas Detector

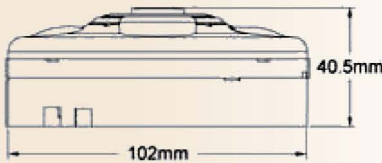

Characteristics

- The AH-0822 features advanced technology, high accurate detection, low power-consumption and fast reaction time. It can detect natural gas and propane gas. Built-in buzzer and LED indicator alert by sounding and flashing.
- Sounding and flashing in alarm status; the green LED is lit during monitoring and the red LED flashes in alarm status.
- Dual power input: 12VDC and 24VDC operation in the same unit. No adjustment is required.
- **Optional 110VAC or 220VAC adaptor is available.**

Specifications

GAS DETECTOR	AH-0822	
Power Source	12V DC	24V DC
Standby Current	65~70mA	35~40mA
Alarm Current	90~105mA	75~90mA
Warm-up Period	about 35 seconds	
Sensitivity	0.050~0.300%	
Alarm Sound	90dB/M and above	
Detection Type	Natural Gas & Propane Gas	
Output Relay	signal transfer NO/NC contact	
Ambient Temperature	-10°C ~ +55°C	
Dimensions	102 mm (Dia.) x 40.5 mm (H)	
Weight	About 130g	